



DATA SHEET

S-PAVER LED Kit 4 3200

1545174

S-PAVER LED Kit 6 3200



1545175



The Kits include 4 or 6 S-Paver lights, each with 5 m connection cable and power supply with serial connection module.



S-PAVER LED Kit 4 3200
 S-PAVER LED Kit 6 3200

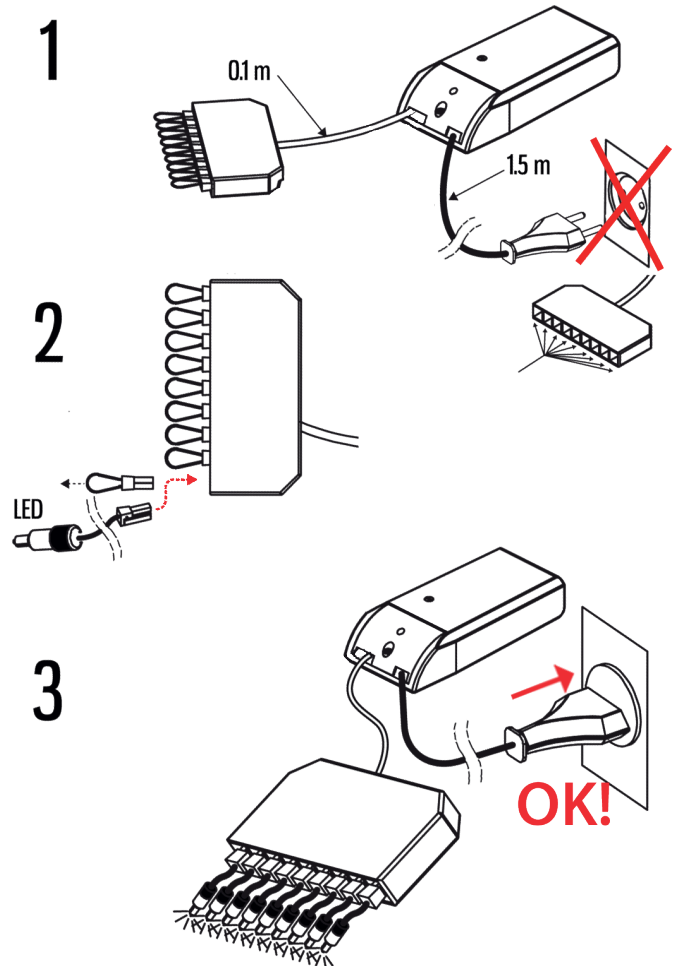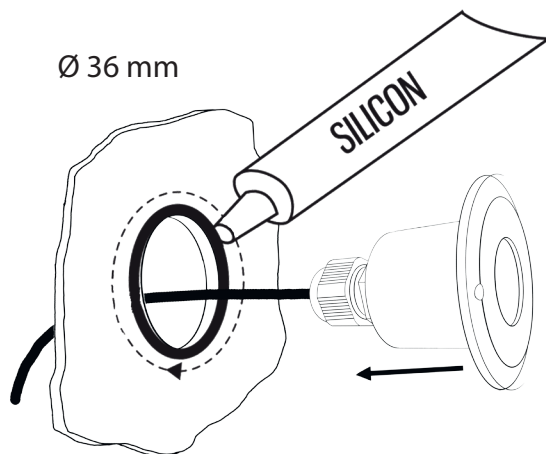

RECOMMENDED TRANSFORMER SETS:

Transformer	Product No.	Dimmer	Min W	Max W	IP
Osram OTe 13/220-240/350 PC	1532283	*	6	9	20
Osram OTe 18/220-240/350 PC	1532284	*	9	17	20
Osram OTe 20/220-240/350 PC	1532266	*	15	18	20
KIT 4 and 6 → Osram OT 9/220-240/350 DIM	1532268	1 - 10 V	1	7	20

- * Leading and Trailing Edge Dimmer.
- * Power supply: Ambient temperature 0°C ... 45°C



DATA SHEET

S-PAVER LED Kit 4 3300

1545176

S-PAVER LED Kit 6 3300


1545177




The Kits include 4 or 6 S-Paver lights, each with 5 m connection cable and power supply with serial connection module.




S-PAVER LED Kit 4 3300
S-PAVER LED Kit 6 3300

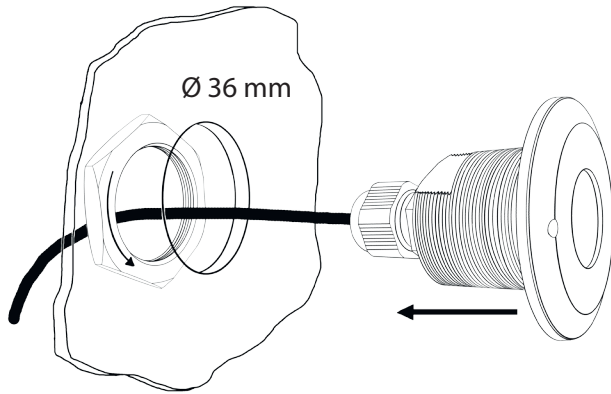


1

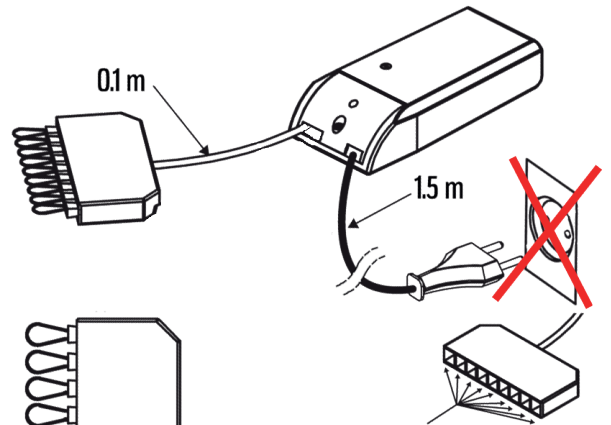

2

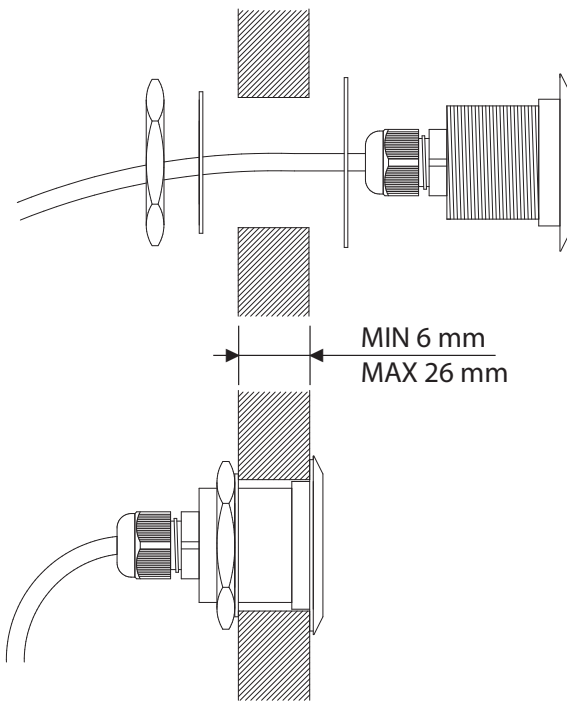

3

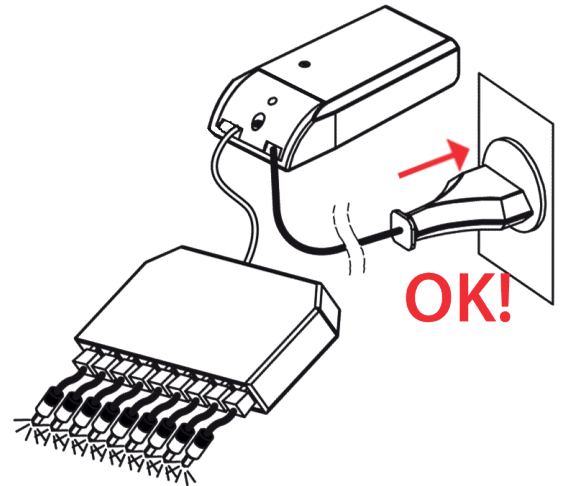

RECOMMENDED TRANSFORMER SETS:

Transformer	Product No.	Dimmer	Min W	Max W	IP
Osram OTe 13/220-240/350 PC	1532283	*	6	9	20
Osram OTe 18/220-240/350 PC	1532284	*	9	17	20
Osram OTe 20/220-240/350 PC	1532266	*	15	18	20
KIT 4 and 6 → Osram OT 9/220-240/350 DIM	1532268	1 - 10 V	1	7	20

* Leading and Trailing Edge Dimmer.


* Power supply: Ambient temperature 0°C ... 45°C



DATA SHEET

S-PAVER RGBW 3200 Kit 5


1545198

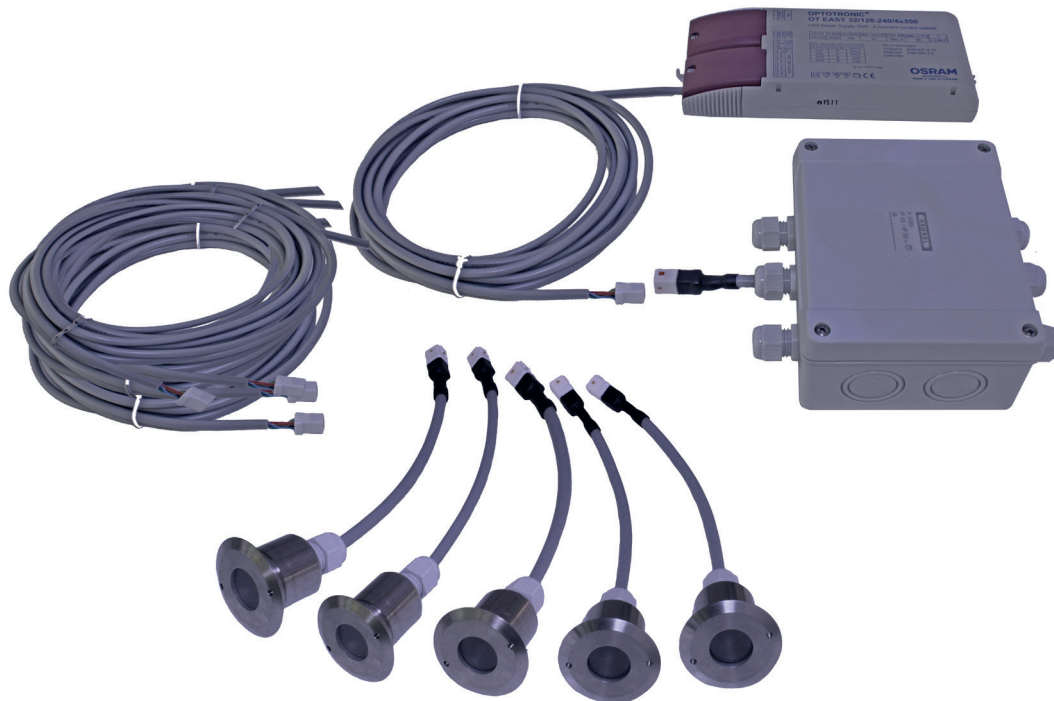

The Kits include 4 or 6 S-Paver lights, each with 5 m connection cable and power supply with serial connection box.

- S-Paver IP68
- Connectionbox IP65
- Power supply IP20



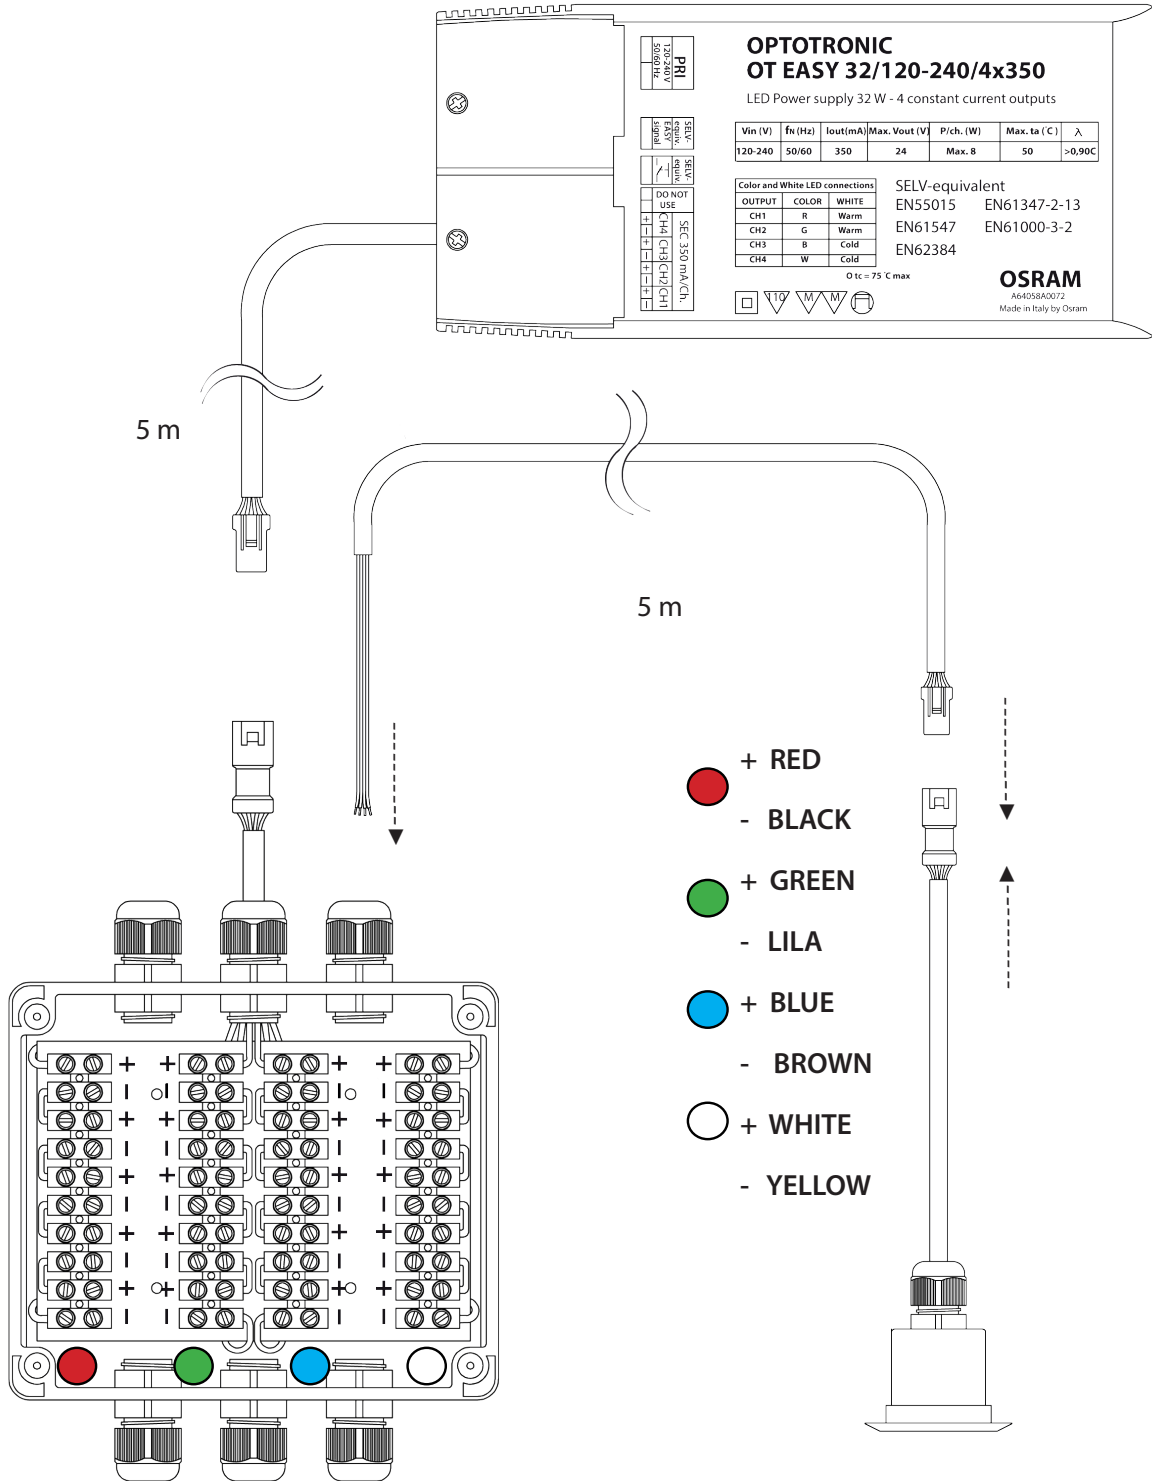




DATA SHEET

S-PAVER RGBW 3300 Kit 5

1545178

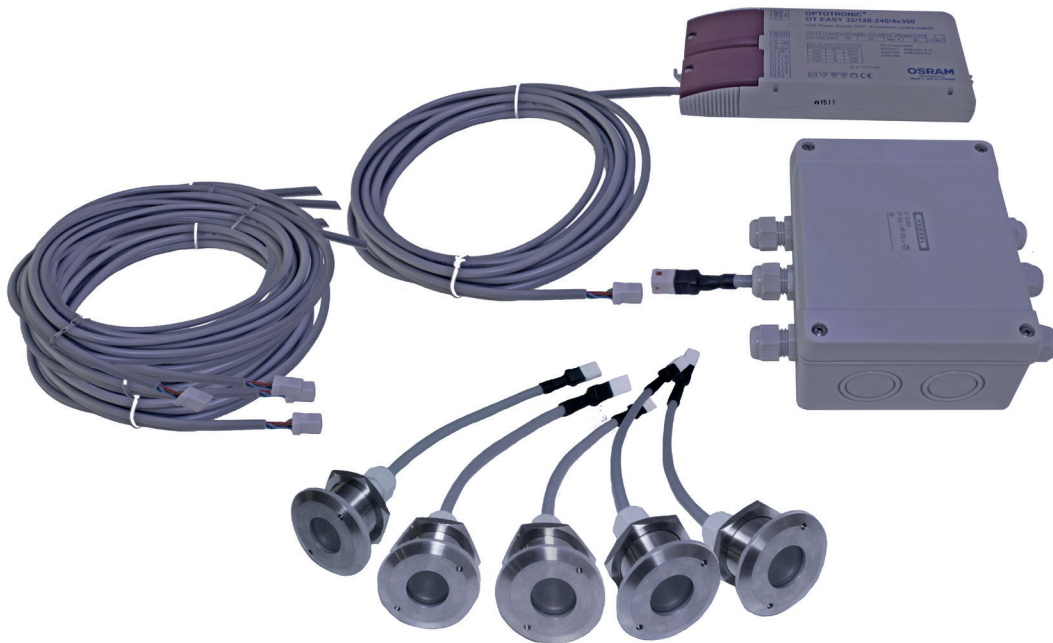

The Kits include 4 or 6 S-Paver lights, each with 5 m connection cable and power supply with serial connection box.

- | | |
|-----------------|------|
| - S-Paver | IP68 |
| - Connectionbox | IP65 |
| - Power supply | IP20 |





DATA SHEET

OPTOTRONIC
OT EASY 32/120-240/4x350
 LED Power supply 32 W - 4 constant current outputs


Vin (V)	fn (Hz)	Iout (mA)	Max. Vout (V)	P(ch. (W)	Max. ta (°C)	λ
120-240	50/60	350	24	Max. 8	50	>0.90C

Color and White LED connections

OUTPUT	COLOR	WHITE
CH1	R	Warm
CH2	G	Warm
CH3	B	Cold
CH4	W	Cold

SELV-equivalent
 EN55015 EN61347-2-13
 EN61547 EN61000-3-2
 EN62384


OSRAM
 A64088A00/2
 Made in Italy by Osram

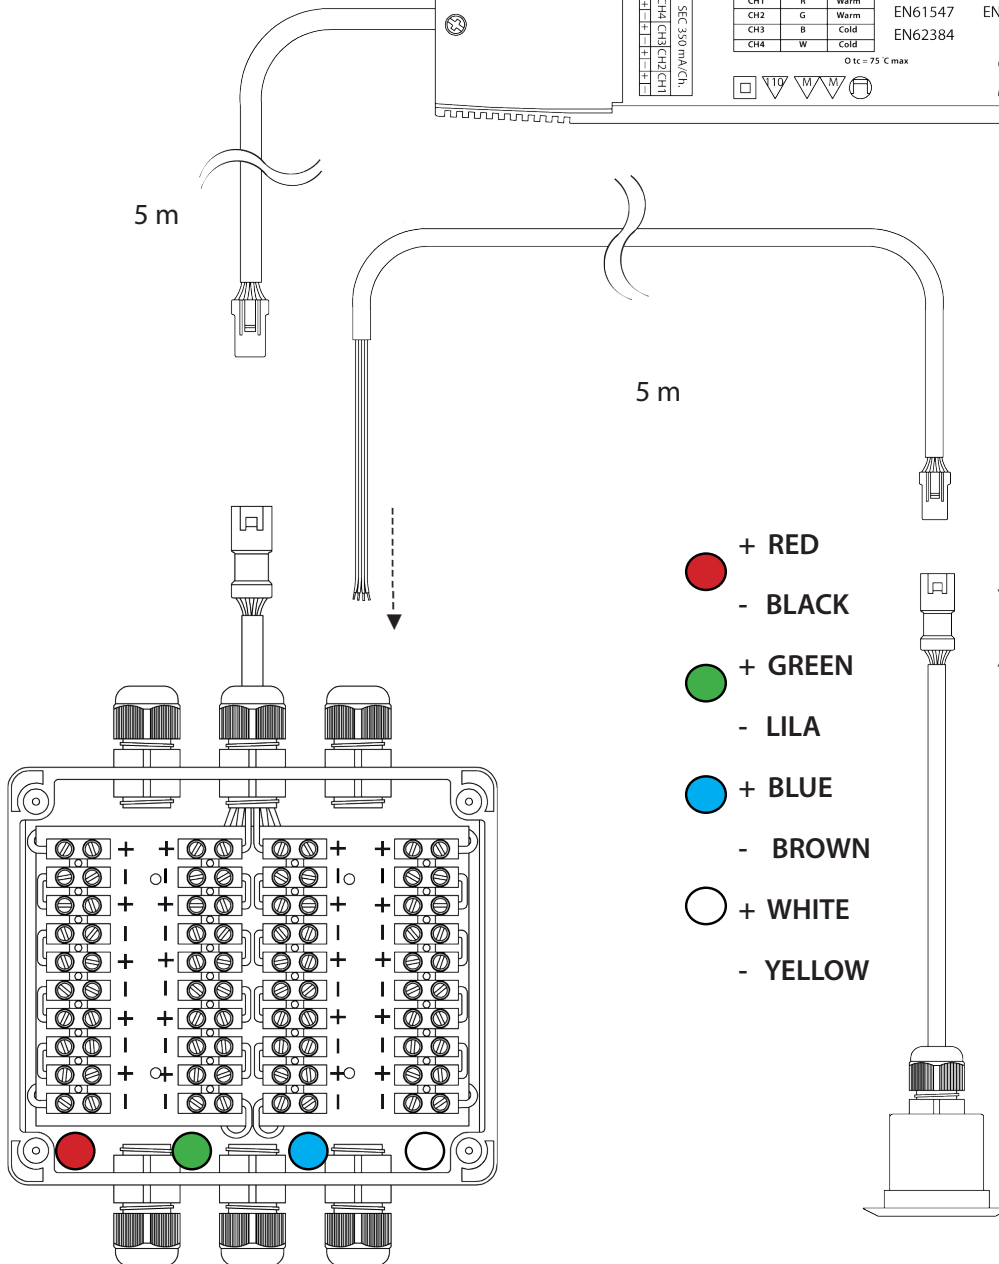


S-Paver LED

Product No.	Model
1553034	S-Paver LED 3200
1553037	S-Paver LED3300

S-Paver 3200

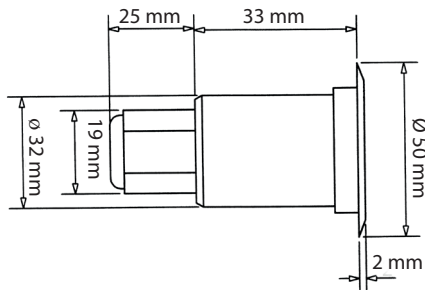


S-Paver 3300

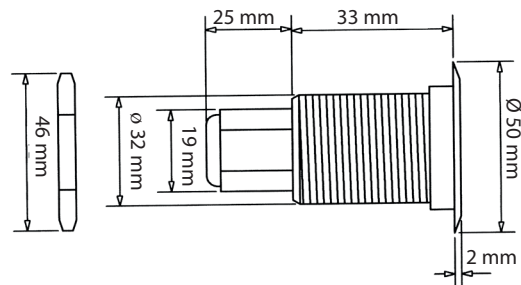

NB! All S-Paver fittings are delivered with both clear and satin glass.
S-Pavers are equipped with a 5 m connection cable.

Product No.	Model	Power	Material	IP	K
1553034	LED S-Paver 3200	1 W / 350 mA	Stainless steel AISI 316L	68	3000
1553037	LED S-Paver 3300	1 W / 350 mA	Stainless steel AISI 316L	68	3000

S-Paver 3200 installing

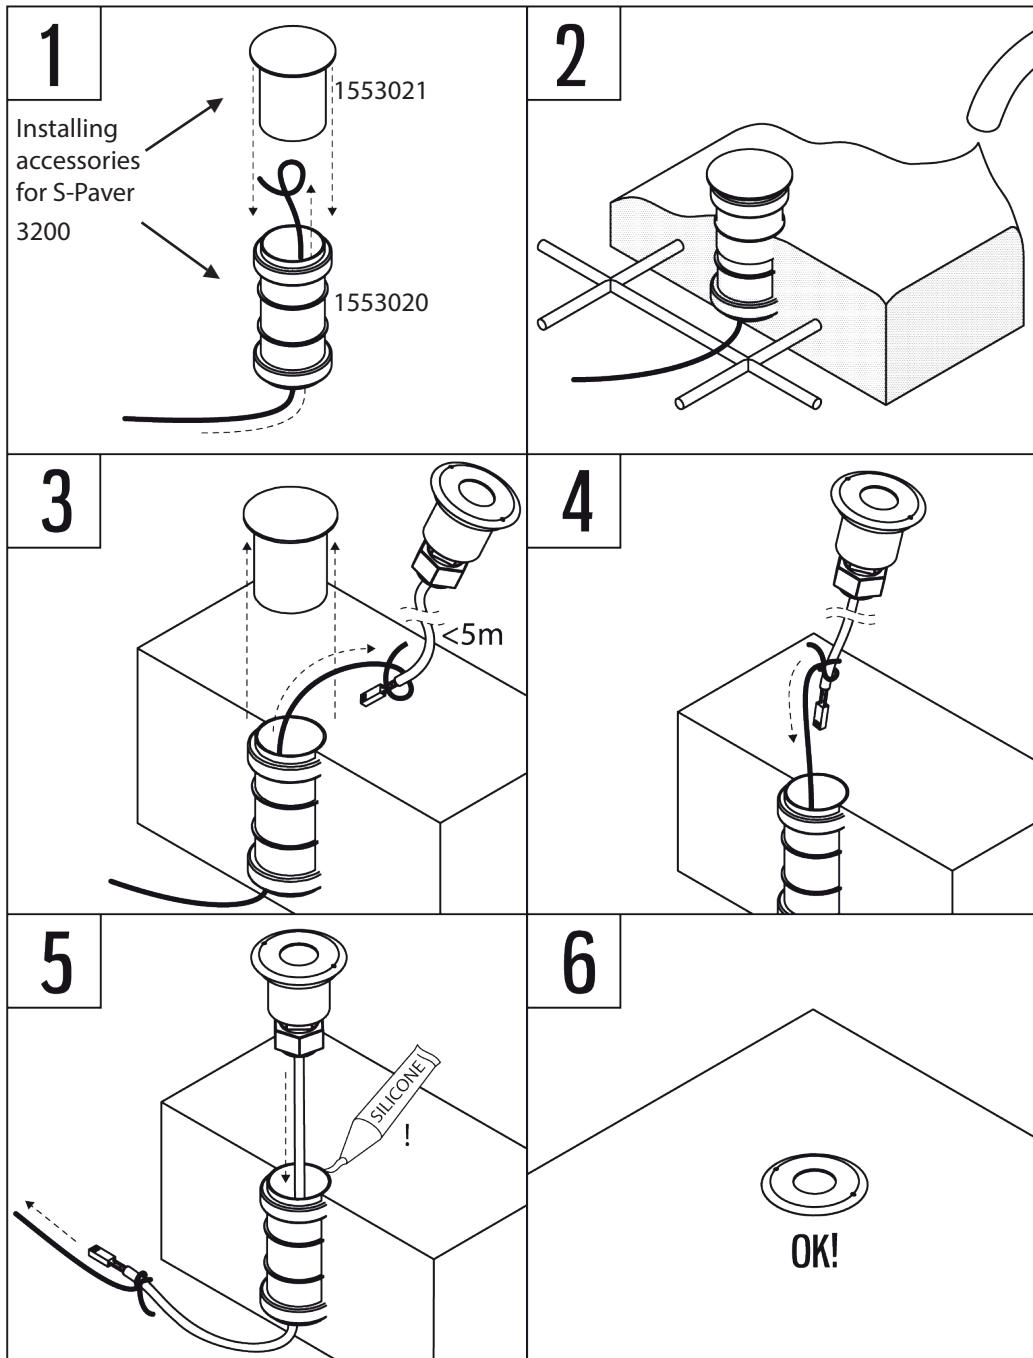

Cable extension kit. Product No. 1532242

Includes a 5 m cable with a connector to transformer and an extension connector IP 67.

